

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IB2006/050855

International filing date: 20 March 2006 (20.03.2006)

Document type: Certified copy of priority document

Document details: Country/Office: EP
Number: 05102311.7
Filing date: 22 March 2005 (22.03.2005)

Date of receipt at the International Bureau: 23 March 2006 (23.03.2006)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

IB/06/50855

Bescheinigung

Certificate

Attestation


Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

05102311.7

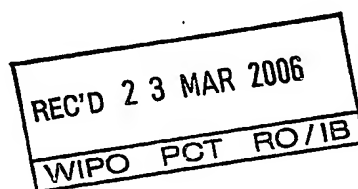

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Anmeldung Nr:
Application no.: 05102311.7
Demande no:

Anmeldetag:
Date of filing: 22.03.05
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

A shift register circuit

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G11C19/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LT LU
MC NL PL PT RO SE SI SK TR LI

DESCRIPTION

A SHIFT REGISTER CIRCUIT

5 This invention relates to shift register circuits, in particular for providing the row voltages to the display pixels of an active matrix display device.

Active matrix display devices comprise an array of pixels arranged in rows and columns, and each comprising at least one thin film drive transistor and a display element, for example a liquid crystal cell. Each row of pixels
10 shares a row conductor, which connects to the gates of the thin film transistors of the pixels in the row. Each column of pixels shares a column conductor, to which pixel drive signals are provided. The signal on the row conductor determines whether the transistor is turned on or off, and when the transistor is
15 turned on (by a high voltage pulse on the row conductor) a signal from the column conductor is allowed to pass on to an area of liquid crystal material, thereby altering the light transmission characteristics of the material.

The frame (field) period for active matrix display devices requires a row of pixels to be addressed in a short period of time, and this in turn imposes a
20 requirement on the current driving capabilities of the transistor in order to charge or discharge the liquid crystal material to the desired voltage level. In order to meet these current requirements, the gate voltage supplied to the thin film transistor needs to fluctuate with significant voltage swings. In the case of amorphous silicon drive transistors, this voltage swing may be approximately
25 30 volts.

The requirement for large voltage swings in the row conductors requires the row driver circuitry to be implemented using high voltage components.

There has been much interest in integrating the components of the row driver circuit onto the same substrate as the substrate of the array of display
30 pixels. One possibility is to use polycrystalline silicon for the pixel transistors, as this technology is more readily suitable for the high voltage circuit elements

of the row driver circuitry. The cost advantages of producing the display array using amorphous silicon technology are then lost.

There is therefore an interest in providing driver circuits which can be implemented using amorphous silicon technology. The low mobility of amorphous silicon transistors, as well as the stress-induced change in threshold voltage, present serious difficulties in implementing driver circuits using amorphous silicon technology.

The row driver circuit is conventionally implemented as a shift register circuit, which operates to output a row voltage pulse on each row conductor in turn.

Essentially, each stage of the shift register circuit comprises an output transistor connected between a clocked high power line and the row conductor, and the drive transistor is turned on to couple the row conductor to the clocked high power line to generate a row address pulse. In order to ensure that the voltage on the row conductor reaches the power line voltage (despite the series-connected drive transistor), it is known to take advantage of a bootstrapping effect, using a stray capacitance of the output transistor. This is discussed in US 6 052 426.

A problem with the use of the parasitic capacitances of the drive transistor in this way is that there are other stray effects, and these are also discussed in US 6 052 426. One solution to this is to cancel the effect of the stray capacitance by introducing a first additional capacitor, and to introduce a second additional capacitor dedicated to the bootstrapping operation.

Shift register circuits using additional bootstrapping capacitors in this way are disclosed in US 6 052 426 and in US 6 064 713. In these circuits, the gate of the output transistor is charged by the row pulse of the preceding row, through an input transistor. As a result, the maximum gate voltage which can be applied to the output transistor is dependent on the threshold voltage of the input transistor. Particularly when implementing the shift register circuit using amorphous silicon technology, this can become a limiting factor in the performance of the circuit. This is particularly a problem at low temperatures,

as the TFT mobility is then at its lowest, and the threshold voltage is at its highest.

These bootstrapping measures improve the performance of the circuit and improve the tolerance to variations in transistor characteristics. This in
5 turn gives rise to an increased lifespan for the circuit.

Implementations of these circuits use the outputs from previous rows as control signals for a given row, to control the timing of the bootstrapping effects. The finite output impedance of the output transistors, and the capacitive load of the matrix array, causes the output pulses to become
10 rounded. As these output pulses are used as control inputs for the driver circuits for other rows, this has an effect on the other rows. This provides a limitation to the performance of the gate driver circuit.

According to the invention, there is provided a shift register circuit
15 comprising a plurality of stages, each stage comprising an input section and an output section, each stage being for providing a signal to an output load,

wherein the input section of each stage comprises an input section drive transistor for coupling a first clocked power line voltage to the output of the input section, an input section compensation capacitor for compensating for
20 the effects of a parasitic capacitance of the input section drive transistor and a first input section bootstrap capacitor connected between the gate of the drive transistor and the output of the input section,

wherein the input section of each stage uses the output of the input section of at least one preceding stage as a timing control input for controlling
25 a bootstrap function,

and wherein the output section of each stage comprises a circuit which receives the outputs of multiple input sections as timing signals for generating output signals for the output loads.

This circuit uses two stages to generate a shift register output for driving
30 a load. One stage provides the required timing signals, and has feedback of timing signals from stages to other stages. This stage has low output load, and can therefore be realized with low size components, and the timing signal

retain their shape even when there is degradation of the component characteristics. The output stage drives the load, and the output signals are not used as feedback timing signals, so that the output load does not degrade the timing control signals used in other stages. Preferably, the output of each
5 output section is used only for driving the respective output load.

The output section may also comprise:

a first output section input connected to the output of the input section of the preceding stage;

an output section drive transistor for coupling a first clocked power line
10 voltage to the output of the output section;

an output compensation capacitor for compensating for the effects of a parasitic capacitance of the output section drive transistor;

a first output section bootstrap capacitor connected between the gate of the drive transistor and the output of the stage; and

15 an output section input transistor for charging the first bootstrap capacitor and controlled by the first output section input.

The input and output sections may thus each have the same design, and differ only in respect of the use of feedback signals.

The input (and output) section of each stage may further comprises a
20 portion coupled to the output of the input section stage two stages before the stage, and wherein the portion comprises a second bootstrap capacitor connected between the gate of the input transistor and the first input.

This circuit arrangement uses two bootstrapping capacitors. One is to ensure the full power supply line voltage can be coupled to the output, and the
25 other is for ensuring that the full row voltage from the preceding stage is coupled through the input transistor to the drive transistor during the gate charging step. The circuit has two precharge cycles of operation – a first cycle when the input transistor gate is precharged, and a second cycle when the drive transistor gate is precharged. This makes the circuit less sensitive to
30 threshold voltage levels or variations, and enables implementation using amorphous silicon technology.

Each stage preferably further comprises a second input connected to the output of the next stage, connected to the gate of a reset transistor which is connected between the gate of the drive transistor and a low power line. The circuit thus has two precharge cycles, one output cycle, and a reset cycle.

5 The compensation capacitor of each stage is preferably connected between the gate of the drive transistor and a second clocked power line voltage which is clocked complementarily with the first power line voltage. This operates to cancel the effects of parasitic capacitances of the drive transistor.

10 In one embodiment, the portion (coupled to the output of the input section stage two stages before the stage) comprises circuit elements for storing a transistor threshold voltage on the second bootstrap capacitor.

For example, the portion may further comprise:

a second input transistor which supplies the output of the stage two stages before the stage to the gate of the first input transistor; and

15 a decay transistor connected in parallel with the second bootstrap capacitor for decaying the voltage on the second bootstrap capacitor until the threshold voltage of the decay transistor is reached.

20 The decay transistor preferably has its gate connected to the gate of the first input transistor, so that they are subject to the same voltage stress, and may also have the same dimensions as the first input transistor. The decay transistor is thus used as a model of the input transistor, and the decay transistor threshold voltage is used to represent the input transistor threshold voltage.

25 The portion may further comprise a reset transistor having its gate connected to the output of the stage, for discharging the second bootstrap capacitor.

30 In another embodiment, the portion further comprises a second input transistor, which supplies the output of the stage two stages before the stage to the gate of the first input transistor, and this can provide a higher voltage to the second bootstrap capacitor.

The first input transistor may then be connected between an input line and the gate of the drive transistor, and the input line is high when output of

the stage before is high, and is high at least immediately after the output of the stage before has a transition from high to low.

The portion may further comprise an input section reset transistor which is connected between the gate of the first input transistor and a low power line.

5 The shift register circuit of the invention is particularly suitable for use in the row driver circuit of an active matrix display device, for example an active matrix liquid crystal display device.

10 The invention also provides a method of generating multiple stage shift register circuit outputs for providing a signal to an output load, comprising, for each stage of the shift register circuit:

controlling an input section to couple a first clocked power line voltage to the output of the input section, compensating for the effects of a parasitic capacitance of a drive transistor, using the output of the stage one stage before the stage to charge the gate of the drive transistor through an input transistor and to charge a first bootstrap capacitor storing the gate-source voltage of the drive transistor; and

15

controlling an output section using the outputs of the input sections as timing signals for generating output signals to the output loads.

20 An example of the invention will now be described in detail with reference to the accompanying drawings, in which:

Figure 1 shows a known shift register circuit;

Figure 2 shows a first example of shift register circuit proposed by the applicant;

25 Figure 3 shows a modification to the circuit of Figure 2;

Figure 4 shows the timing of operation of the circuit of Figure 2;

Figure 5 shows a second example of shift register circuit proposed by the applicant;

Figure 6 shows a modification to the circuit of Figure 5;

30 Figure 7 shows the timing of operation of the circuit of Figure 5;

Figure 8 shows a shift register circuit of the invention;

Figure 9 shows one example of a known pixel configuration for an active matrix liquid crystal display; and

Figure 10 shows a display device including row and column driver circuitry, in which the circuit of the invention can be used.

5

Figure 1 shows a known high impedance gate driver circuit suitable for use in amorphous silicon active matrix liquid crystal displays (AMLCDs). The circuit shown is a single stage of a multiple stage shift register, with each stage being used to supply a row voltage pulse to one row of pixels. A similar circuit
10 has been described in US 6 052 426.

The circuit comprises an output drive transistor T_{drive} coupled between a clocked power line P_n and the row conductor R_n which is controlled by the stage. The clocked power line (and the complementary signal $invP_n$) is a two phase signal, and the cycles of the clocked power line determine the timing of
15 the sequential operation of the shift register stages.

The row pulse on the previous row R_{n-1} is used to charge the output transistor gate through a diode-connected input transistor T_{in} .

A first capacitor C_1 is connected between the output transistor gate and the control line which carries the complementary signal to the clocked power line P_n and the purpose of the capacitor C_1 is to offset the effects of internal
20 parasitic capacitances of the output transistor.

An additional bootstrapping capacitor C_2 is provided between the gate of the output transistor and the row conductor (i.e. the output of the stage).

The stage is also controlled by the row pulse on the next row R_{n+1} ,
25 which is used to turn off the stage by pulling down the gate voltage of the output transistor. The row pulse on the next row R_{n+1} is provided to the gate of the output transistor through an input transistor $T_{r(n+1)}$ associated with the next row conductor signal.

The circuit also has two reset transistors T_{r-n} and T_{r-r} which are used
30 when initially powering the circuit.

In operation, the input transistor T_{in} charges the output transistor gate during the previous row pulse. During this previous row pulse, the power line

P_n is low and the inverse power line $\text{inv}P_n$ is high. The output transistor is turned on by this previous row pulse, but as the power line P_n is low, the output of the stage remains low.

During this charging stage, the bootstrapping capacitor C_2 is charged to
5 the row voltage pulse (less the threshold voltage of the input transistor T_{in}).

During the next clock cycle, the clock signal P_n is high, and this increase in voltage pulls up the output voltage on the row conductor R_n through the output transistor. The effect of the bootstrapping capacitor C_2 is to increase the gate voltage to ensure that the full voltage level of the clocked signal P_n is
10 passed to the row conductor R_n . The transistor $T_{r(n+1)}$ subsequently resets the output transistor gate voltage node during the next row pulse.

In the idle state, the coupling of the inverse power line $\text{inv}P_n$ through the first additional capacitor C_1 is designed to prevent the output transistor gate from turning on when the output transistor T_{drive} receives a pulse from P_n .

15 The operation of the circuit as described above will be known to those skilled in the art.

As mentioned above, one limitation of the operation of the circuit of Figure 1 is that the charging of the gate of the output transistor during the timing of the previous row pulse is dependent on the threshold voltage of the
20 input transistor T_{in} . For amorphous silicon transistors, this threshold voltage may be significant, and furthermore may vary significantly with temperature and over time.

The applicant has proposed (but not yet published) an additional input section which is coupled to the output of the stage two stages before the
25 stage. This input section comprises a second bootstrap capacitor connected between the gate of the input transistor and the first input, and operates to cancel the effects of the threshold voltage of the input transistor in the charging of the drive transistor gate.

Figure 2 shows one stage of a shift register circuit proposed by the
30 applicant.

The circuit includes a precharge circuit 10 which is used to sample a TFT threshold voltage onto a second bootstrap capacitor C_3 . This is then used

to bootstrap the input TFT T_{in1} , resulting in good charging of the gate of drive transistor gate voltage regardless of the threshold voltage of the input transistor. The row circuit then resets the charge on C_3 , so that the input TFT T_{in1} does not drift. The other parts of the circuit of Figure 2 are the same as in
 5 Figure 1, and a description of these components will not be repeated.

The precharge circuit 10 has an input connected to the output R_{n-2} of the stage two before the stage shown. This output R_{n-2} is coupled through a second input transistor T_{in2} to the gate of the first input transistor T_{in1} .

The second bootstrap capacitor C_3 is connected between the gate of
 10 the first input transistor T_{in1} and the output of the preceding stage R_{n-1} .

A decay transistor T_{decay} is connected in parallel with the second bootstrap capacitor C_3 and is diode-connected. The gate of the decay transistor is connected to the gate of the first input transistor T_{in1} so that they experience the same voltage stress. The decay transistor preferably also has
 15 substantially the same dimensions as the first input transistor T_{in1} .

The precharge section 10 has a reset transistor $T_r(n)$ having its gate connected to the output of the stage R_n , for discharging the second bootstrap capacitor C_3 .

In operation, the row pulse for the row R_{n-2} two behind the current row is
 20 used to charge the gate of the first input transistor T_{in1} and the second bootstrap capacitor C_3 via the second input transistor T_{in2} . This charging is limited by the decay of the charge through the decay transistor T_{decay} .

When row $n-2$ goes low, the decay transistor T_{decay} causes the voltage across the second bootstrap capacitor C_3 to decay to approximately the TFT
 25 threshold voltage. The decay transistor T_{decay} and the first input transistor T_{in1} experience the same gate biases at all times, so even in the event of any threshold voltage drift they will exhibit the same threshold voltage.

When row $n-1$ pulses high, the gate of the first input transistor T_{in1} is bootstrapped by the second bootstrap capacitor C_3 , resulting in good charging
 30 of the gate of the drive transistor T_{drive} .

When row $n-1$ goes low, the charge is not removed via T_{in1} as it is near threshold. Instead, as soon as row n goes high, the discharge transistor $T_{r(n)}$

discharges the voltage across the second bootstrap capacitor C_3 , turning the first input transistor T_{in1} completely off.

The circuit operation then proceeds as in the known circuit of Figure 1.

The reset transistor $T_{r(n)}$ can be placed with its lower side connected to the low voltage line V_{off} (as shown), or it can be connected to the preceding row $n-1$.

The circuit of Figure 2 benefits from a low number of control lines. One disadvantage is that currents required to charge the capacitances in the circuit are drawn from the row outputs from other stages, and this limits performance.

A modification to the circuit of Figure 2 is shown in Figure 3, in which the input transistors T_{in1} and T_{in2} both couple a dc voltage " V_{high} " to the respective capacitor. An additional reset transistor is shown in the input section 10. The coupling of a high dc voltage is more easily achieved with bottom gate transistor technology. This design reduces the load on the previous row, as the charging currents are drawn from the dc supply. This gives improved circuit performance.

A further benefit of the circuit of Figure 3 is that the circuit can be controlled to provide an idle mode of operation. In an idle state, the circuit presents a high impedance to the row, so that the row pulses can be controlled by a different row driver circuit connected to the other end of the row conductor. It is known to provide two row driver circuits on opposite sides of a display, for example to provide two different modes of operation (different powers, or driving in different directions to allow the display to be used either way up), and an idle mode is required in this case.

The idle mode can be applied to the circuit of Figure 3 by changing V_{high} to V_{off} , and applying the P_n and inverse pulses.

Figure 4 is used to explain schematically the timing principles of operation of the circuit of Figure 2, and the same general principles apply to Figure 3. The plots show the clocked power supply lines, the gate voltage on the first input transistor T_{in1} , the gate voltage on the drive transistor T_{drive} and the output R_n .

During the timing $n-2$ of the stage two behind, the second bootstrap capacitor C_3 is precharged. At the end of this phase, there is a drop in voltage until the capacitor stores the threshold voltage. This decay of the voltage on the second bootstrap capacitor continues during the application of the output pulse $n-1$ to the input transistor, and by the end of the output pulse for row $n-1$, the voltage across the second bootstrap capacitor will have decayed to the threshold voltage, so that threshold compensation is effective for the input transistor, and the full row voltage is used to charge the first bootstrap capacitor.

During the stage $n-1$, the output of the stage $n-1$ is capacitively added to the voltage on the second bootstrap capacitor to derive the gate voltage which drives the first input transistor T_{in1} .

During stage $n-1$, the first bootstrap capacitor C_2 is also charged, as can be seen from the plot for the drive transistor gate.

During stage n , the clocked power supply line voltage P_n is added to the voltage on the first bootstrap capacitor C_2 to derive the gate voltage of the drive transistor T_{drive} .

The beginning of cycle n is used to discharge the second bootstrap capacitor C_3 through the reset transistor $T_{r(n)}$ controlled by R_n .

The circuit of the invention is particularly suitable for use in the row driver circuit of an active matrix liquid crystal display.

The circuit shown in Figure 2 uses an extra input stage to correct for the threshold voltage of the input TFT (T_{in}).

The timing diagram of Figure 4 uses two phase clocking. In practice, the implementation of the circuit of Figure 3 will use three phase clocking. In other words, the values of P_{n-2} and P_n are no longer the same. An example of three phase clocking is shown in Figure 7, described below. The use of a dc voltage in Figure 3 requires the three phase control signals to prevent C_3 and C_2 both charging during the R_{n-2} row pulse.

An alternative approach is to adapt the input stage so that it is not limited to raising the effective gate drive voltage of T_{in} by its threshold voltage,

but can raise the drive voltage by a much larger amount. This further improves the charging of the circuit capacitance nodes, and so improves operation.

Figure 5 shows one stage of another example of shift register circuit proposed by the applicant.

5 The circuit is the same as the circuit of Figure 2, apart from the input section 10, and a description of the repeated circuit components will not be given.

10 The input section 10 again has a second input transistor T_{in2} which supplies a signal with timing based on the output of the stage two stages before the stage to the gate of the first input transistor T_{in1} . In the circuit of Figure 4, the output R_{n-2} two stages before controls the timing, but a different voltage waveform is applied to the drain of the second input transistor T_{in2} , and this is shown as L_{n-2} . This will be called a second input line.

15 Similarly, the first input transistor T_{in1} is connected between a first input line L_{n-1} and the gate of the drive transistor T_{drive} . The input line L_{n-1} is high when the output of the stage before is high, so that the operation is similar to Figure 2. However, for reasons explained below, the input L_{n-1} is also high immediately after the output of the stage before has had a transition from high to low.

20 The first and second input lines may be clocked signals, but they can be delayed versions of each other, so that there is effectively only one additional clocked signal for each phase of the input clocks P_n . Alternatively, dc voltages may be used.

25 As in the circuit of Figure 2, the second bootstrap capacitor C_3 is connected between the output R_{n-1} of the previous stage and the gate of the first input transistor T_{in1} , and this second bootstrap capacitor is charged with timing based on the output of the stage two stages before. However, there is no decay transistor, so that the charge on the second bootstrap capacitor is not limited to a threshold voltage, but can instead be selected based on the
30 voltage of the input L_{n-2} minus the threshold voltage of T_{in2} .

An (optional) input section reset transistor T_{r2} is connected between the gate of the first input transistor T_{in1} and the low power line V_{off} , and this is for reset of the driver.

The gate of the first input transistor T_{in1} may be connected to a clocked
5 signal which is the inverse of the first input line L_{n-1} through a capacitor C_4 , and this is to prevent the rising edge of L_{n-1} coupling through the parasitic gate-drain capacitance of T_{in1} and turning it on. The capacitor C_4 couples in a complementary signal that cancels this effect out, and the value of C_4 is accordingly chosen to be proportional to the capacitance of T_{in1} with the same
10 proportionality as between C_1 and the drive transistor.

In the embodiment of Figure 5, the input section feedback reset transistor $T_{r(n)}$ is connected between the gate of the first input transistor T_{in1} and the output of the preceding stage R_{n-1} , and again has its gate connected to the output of the stage, for discharging the second bootstrap capacitor C_3 .

15 In operation of the circuit of Figure 5, the high pulse of the output of the stage two stages behind R_{n-2} again charges the second bootstrap capacitor C_3 through the second input transistor T_{in2} . The second input line L_{n-2} is high during this time. There is no decay transistor to limit the charging. Thus, instead of charging C_3 to a threshold voltage, it may charge to the voltage of
20 the second input line, less the threshold voltage of the second input transistor. This second input line will typically carry the row voltage, but the timing is not the same, as explained below.

When the preceding stage output R_{n-1} pulses high, and the first input line L_{n-1} is also high, the gate of the first input transistor T_{in1} is bootstrapped by
25 the second bootstrap capacitor C_3 , resulting in very good charging of the gate of the drive transistor T_{drive} .

When the output R_{n-1} goes low, the charge is not removed from the first bootstrap capacitor C_2 via T_{in1} as L_{n-1} is arranged to remain high until after C_3 is discharged. This is the reason why different timing is needed for the first
30 input L_{n-1} than the timing of the output R_{n-1} , even though the voltage levels can be the same. As soon as row N goes high, the feedback reset transistor $T_{r(n)}$

discharges the voltage across C_3 , turning T_{in1} completely off, in the same way as for the embodiment of Figure 2.

The circuit operation proceeds in the same way as explained above.

The circuit of Figure 5 has the same number of TFTs as in Figure 2, but
5 some extra clock lines are required. However, the bootstrapping of the first input transistor T_{in1} is far better.

If the TFT technology has sufficiently good switching characteristics, a DC voltage equivalent to the row high voltage may replace the clocked signals L_n .

10 In this case, the capacitor C_4 and the inverted clocks L_n are not required, and circuit performance is improved even further.

The circuit of Figure 5 has the same further benefits mentioned above that the internal capacitance nodes draw their charging current from the clock lines L_n , rather than the previous rows. This decreases the load which needs
15 to driven by each output TFT.

This circuit also has the benefit that by applying appropriate signals, the row driver may remain in the idle state, while another row driver drives the display with a differing pulse sequence. As mentioned above, this can be used, for example, to provide a display that can scan in forwards or reverse
20 directions.

Figure 6 shows a modification to the circuit of Figure 5, in which dc voltages are again used in place of the timing signals L_n , and this is again most appropriate for bottom gate technology. This reduces the clock count and avoids the need for the capacitance C_4 . The circuit can be idled in the
25 same way as explained with reference to Figure 3.

Figure 7 shows a clock timing diagram for the circuit of Figure 5, and shows signals for the input lines L for three successive rows as well as signals for the power lines for the three successive rows.

As shown, the pulses on the input lines L have a duration longer than
30 the row address period, and this duration is shown by way of example as $60\mu s$. The clocked power line pulses are shorter, shown by way of example as $40\mu s$.

The signals shown in the timing diagram have repeating pulses, so that only three different power P and input line L waveforms and their complements are needed to address the full array.

The circuits described above provide improved tolerance to degradation
5 of transistor characteristics.

One limitation to the performance of the circuits described above results from rounding of the row pulse shapes. These row pulses control the turn-on of the control transistors for other stages of the shift register circuit. The row pulses, which are the output pulses of the stages, become rounded as a result
10 of the finite output impedance of the output transistors and the capacitive load of the pixel rows driven by the stages. This rounding of pulses reduces the charging of nodes in other stages which use these signals as gate control signals for transistors, limiting the performance of the driver circuit.

This invention relates to a shift register circuit in which a compensation
15 capacitor is used for compensating for the effects of a parasitic capacitance of the drive transistor, and a bootstrap capacitor is used, as in the examples above. The output of at least one preceding stage is used as a timing control input for controlling the bootstrap function. This functionality is provided in an input section. In addition, each stage has an output section which receives the
20 outputs of multiple input sections as timing signals for generating output signals for the output loads.

This arrangement splits the circuit functionality into two portions. An input section is used to derive the different pulse sequences with correct timing, but is not used to drive the output load directly. As a result, the pulse
25 shapes at the outputs are more tolerant to ageing of transistor characteristics, as the transistors are subjected to lower loads. An output stage drives the output load (for example the rows of pixels), but these outputs are not needed as feedback signals, so that any loss in shape in these signals does not affect directly the control signals in other stages of the circuit.

30 Figure 8 shows a first example of circuit of the invention.

Each stage of the circuit is arranged as two parts; an input section 60 and an output section 62.

The input section 60 derives the required row pulses in exactly the same manner as described above, with each circuit using feedback from one or more of the other circuits to control the timing. By way of example, the input section may be based on the circuit shown in Figure 5, and the circuit elements of the input section 60 are outlined in Figure 5.

The input section 60 uses the outputs as feedback paths, and Figure 8 shows schematically each input section providing its output to the following circuit. In other words, the circuit providing output R_n uses R_{n-1} as an input. The circuit of Figure 5 uses the two preceding outputs (R_{n-1} and R_{n-2}) as well as the output of the next stage (R_{n+1}), but this is not shown in Figure 8 to reduce complexity of the drawing.

The invention can be applied to any of the circuits described above, including the known circuit of Figure 1, which uses only the preceding output signal as a timing control signal.

The components used in the output section 62 are also shown outlined in Figure 5 for the case where the output section is also modeled on the circuit of Figure 5. The output sections do not provide the feedback paths. Instead the timing control signals are provided as direct connections from the input sections.

The outputs of the output sections each drive a respective load 64, which is also shown outlined in Figure 5.

The circuit of the invention thus essentially comprises two connected row drivers. The input section row driver provides direct signals to the output section row driver and to the input section row driver as feedback signals, whereas the output section row driver provides only the output signals.

The input section is thus loaded more lightly, and can therefore provide more ideal input signals. The loading on the output section row driver has almost no effect on circuit performance.

This design enables the circuit as a whole to tolerate increased transistor degradation. The circuit can, for example, double the threshold voltage drift which can be tolerated, and this in turn can give rise to an

increase in lifetime of a display using the row driver by a factor of approximately 10.

By changing the design parameters, these gains can be translated into increased power capability and/or increased frequency of operation. This can then enable amorphous silicon technology to be used for the row driver circuits of large area display panels.

The two copies of the row driver can share the same clock signals, which means that the architecture needs no more input signals than the basic design.

Of course, the circuit area is increased compared to the conventional design, but not by a factor of two, as the clock lines may be shared between the two parts. Furthermore, the two parts of the row driver do not have to be identical in size. All devices in the input section first may be scaled down in size by a factor (for example a factor of 2-10), because the load on the input section is much lower than the array load.

This is particularly the case when the charging of the bootstrap and compensation capacitors is effected from dc voltage lines, rather than using the outputs from other input sections. The input section can then provide near ideal waveforms even when significantly scaled down in device dimensions.

The two row driver sections do not need to be precisely identical in circuit. It is preferable that the two circuits share the same clock signals, so that the overall circuit area is minimised. However, the circuit may combine any two of the circuit examples given above as the input and output sections.

As mentioned above, the use of identical clocking in the two circuit sections is desirable. The use of different clocking for the input and output sections does, however, provide the opportunity to give additional functionality.

In particular, the input section can be clocked as outlined above, to provide the shift register outputs for all rows. This consumes relative low power, as a result of the reduced output load and dimensions for the input section. The output section can then be clocked in a manner to provide a low power partial display function.

An example of the benefit of such a drive scheme is for low power standby modes of portable devices. A mobile telephone in standby mode may need only a limited part of the display area to be used, for the display of the limited information needed when the mobile telephone is turned on but not in use - for example a battery level indicator and signal strength meter.

A further possible benefit of different clocking can be obtained by using shorter duration clock pulses for the output stage than for the input stage. This could be used in a large area display panel, in which the driver is divided into odd lines on one side (for example the left) and even lines on the opposite side. This allows the input section to run at half the line rate (double the line time) compared to the output section, and can be used to improve performance for large panels.

Figure 9 shows a conventional pixel configuration for an active matrix liquid crystal display. The display is arranged as an array of pixels in rows and columns. Each row of pixels shares a common row conductor 71, and each column of pixels shares a common column conductor 72. Each pixel comprises a thin film transistor 74 and a liquid crystal cell 76 arranged in series between the column conductor 72 and a common electrode 77. The transistor 74 is switched on and off by the signals provided on the row conductors 71, as described above. Each pixel additionally comprises a storage capacitor 78 which is connected at one end 79 to the next row electrode, to the preceding row electrode, or to a separate capacitor electrode. This capacitor 78 stores a drive voltage so that a signal is maintained across the liquid crystal cell 76 after the transistor 74 has been turned off.

In order to drive the liquid crystal cell 76 to a desired voltage to obtain a required gray level, an appropriate signal is provided on the column conductor 72 in synchronism with the row address pulse on the row conductor 71. This row address pulse turns on the thin film transistor 74, thereby allowing the column conductor 72 to charge the liquid crystal cell 76 to the desired voltage, and also to charge the storage capacitor 78 to the same voltage. At the end of the row address pulse, the transistor 74 is turned off, and the storage capacitor 78 maintains a voltage across the cell 76 when other rows are being

addressed. The storage capacitor 78 reduces the effect of liquid crystal leakage and reduces the percentage variation in the pixel capacitance caused by the voltage dependency of the liquid crystal cell capacitance.

5 The rows are addressed sequentially so that all rows are addressed in one frame period, and refreshed in subsequent frame periods.

As shown in Figure 10, the row address signals are provided by row driver circuitry 80, and the pixel drive signals are provided by column address circuitry 82, to the array 84 of display pixels. The circuit of the invention is suitable for use in the row driver circuitry, and manufactured using amorphous
10 silicon technology. The circuit elements can then be integrated onto the active matrix display substrate.

The circuit of the invention results in far better operation at low temperatures and a wider process margin. This can then be used to allow smaller components to be used for a given application, resulting in lower
15 power and a smaller circuit design, despite the extra TFTs involved (which are all small).

In the example above, the reset transistor $T_{r(n+1)}$ controlled by the next stage is connected between the gate of the drive transistor and the low power line. It may instead be connected between the gate of the drive transistor and
20 the row output, namely across the first bootstrap capacitor C_2 . Furthermore, this reset transistor could be connected to the output of a different output stage, for example stage $n+2$, $n+3$ etc (up to $n + \text{number of clock phases} - 1$).

As will be apparent from the examples above, the reset transistor $T_{r(n)}$ of the input section can be connected between the gate of the first input
25 transistor T_{in1} and the low power line V_{off} or between the gate of the first input transistor T_{in1} and the preceding row output $n-1$, namely across the second bootstrap capacitor C_3 . These two possibilities are possible for both examples shown. The gate of this reset transistor could also be connected to the output of a different output stage, for example stage $n+1$, $n+2$ etc. The circuits can
30 also function without the reset transistor at all.

In the example of Figure 5, the second input transistor T_{in2} can be diode-connected as in the example of Figure 2, thereby removing the

connection to L_{n-2} . Thus, the embodiment of Figure 5 does not need connection to the second input line L_{n-2} . The connection to L_{n-2} provides the ability of the circuit to remain in an idle state, while the display is driven differently, as mentioned above.

5 The detailed examples above use the output from two stages behind as a control signal. However, the preferred double-precharge effect this produces can be achieved using an output from a stage further back. For example, instead of using R_{n-1} and R_{n-2} as in the examples above, the circuit may be designed to use R_{n-2} and R_{n-4} . This may be desirable if the gate driver is
10 split into odd and even halves, each on different sides of the array. This example also shows that the gate charging controlled by the output of the preceding stage in the examples shown, can in fact also be controlled by a stage further back.

As mentioned above, the invention is particularly suitable for
15 implementation using amorphous silicon transistors, and for this reason, the circuits shown use n-type transistors. However, the invention is also applicable to other circuit technologies, for example organic thin film transistors (which are frequently implemented as p-type devices) or low temperature polysilicon (which may be implemented as PMOS devices). The circuits of
20 the invention can implemented using p-type transistors without modification to the operating principles, and this will be well understood by those skilled in the art. The invention is not intended to be limited to any particular technology type.

It will therefore be apparent that there are numerous variations to the
25 specific circuit described in detail, and many other modifications will be apparent to those skilled in the art.

CLAIMS

1. A shift register circuit comprising a plurality of stages, each stage
5 comprising an input section and an output section, each stage being for providing a signal to an output load,

wherein the input section of each stage comprises an input section drive transistor for coupling a first clocked power line voltage to the output of the input section, an input section compensation capacitor for compensating for
10 the effects of a parasitic capacitance of the input section drive transistor and a first input section bootstrap capacitor connected between the gate of the drive transistor and the output of the input section,

wherein the input section of each stage uses the output of the input section of at least one preceding stage as a timing control input for controlling
15 a bootstrap function,

and wherein the output section of each stage comprises a circuit which receives the outputs of multiple input sections as timing signals for generating output signals for the output loads.

20 2. A circuit as claimed in claim 1, wherein the input section of each stage further comprises:

a first input section input connected to the output of the input section of a preceding stage; and

an input section input transistor for charging the first bootstrap capacitor
25 and controlled by the first input.

3. A circuit as claimed in claim 1 or 2, wherein the output of each output section is used only for driving a respective output load

30 4. A circuit as claimed in any preceding claim, wherein the output section comprises:

a first output section input connected to the output of the input section of the preceding stage;

an output section drive transistor for coupling a first clocked power line voltage to the output of the output section;

5 an output compensation capacitor for compensating for the effects of a parasitic capacitance of the output section drive transistor;

a first output section bootstrap capacitor connected between the gate of the drive transistor and the output of the stage; and

10 an output section input transistor for charging the first bootstrap capacitor and controlled by the first output section input.

5. A circuit as claimed in any preceding claim, wherein the input section of each stage further comprises a portion coupled to the output of the input section stage two stages or more before the stage, and wherein the
15 portion comprises a second input section bootstrap capacitor connected between the gate of the input section input transistor and the first input section input.

6. A circuit as claimed in any preceding claim, wherein the output
20 section of each stage further comprises a portion coupled to the output of the input section stage two or more stages before the stage, and wherein the portion comprises a second output section bootstrap capacitor connected between the gate of the output section input transistor and the first output section input.

25

7. A circuit as claimed in any preceding claim, wherein the input section of each stage further comprises a second input section input connected to the output of the input section of the next stage.

30 8. A circuit as claimed in claim 7, wherein the second input section input is connected to the gate of a reset transistor which is connected between the gate of the input section drive transistor and a low power line.

9. A circuit as claimed in any preceding claim, wherein the input section compensation capacitor of each stage is connected between the gate of the input section drive transistor and a second clocked power line voltage which is clocked complementarily with the first power line voltage.

10. A circuit as claimed in claim 5, wherein the portion comprises circuit elements for storing a transistor threshold voltage on the second input section bootstrap capacitor.

11. A circuit as claimed in claim 5, wherein the portion further comprises:

a second input section input transistor which supplies the output of the stage two or more stages before the stage to the gate of the first input section input transistor; and

a decay transistor connected in parallel with the second input section bootstrap capacitor for decaying the voltage on the second input section bootstrap capacitor until the threshold voltage of the input section decay transistor is reached.

12. A circuit as claimed in claim 11, wherein the input section decay transistor has substantially the same dimensions as the first input section input transistor.

13. A circuit as claimed in claim 5, wherein the portion further comprises a second input section input transistor which supplies the output of the stage two or more stages before the stage to the gate of the first input section input transistor.

14. A circuit as claimed in claim 13, wherein the first input section input transistor is connected between an input line and the gate of the input section drive transistor, and wherein the input line is high when output of the

stage before is high, and is high at least immediately after the output of the input section of the stage before has a transition from high to low.

15. A circuit as claimed in claim 14, wherein the input line is
5 permanently high during operation of the circuit.

16. A circuit as claimed in claim 14 or 15, wherein the portion further comprises a reset transistor which is connected between the gate of the first input section input transistor and a low power line.
10

17. A circuit as claimed in any one of claims 5 or 10 to 16, wherein the portion further comprises a feedback reset transistor having its gate connected to the output of the input section stage, for discharging the second input section bootstrap capacitor.
15

18. A circuit as claimed in any preceding claim, wherein the input section and the output section of each stage have the same circuit elements, and wherein:

in the input section, the input section inputs derived from other input section outputs are provided as feedback paths, and wherein
20

in the output section, the output section inputs derived from other input section outputs are provided as direct paths between the input and output sections.

19. A circuit as claimed in any preceding claim, wherein the input section and the output section share common clock signals.
25

20. A circuit as claimed in any one of claims 1 to 17, wherein the input section and the output section have different clock signals, the clock signals of the output section being used to implement a partial output scheme.
30

21. A circuit as claimed in any preceding claim, implemented using amorphous silicon technology.

22. An active matrix display device, comprising:
5 an array of active matrix display pixels;
row driver circuitry comprising a shift register circuit as claimed in any preceding claim.

23. An active matrix display device as claimed in claim 22,
10 comprising an active matrix liquid crystal display device.

24. A method of generating multiple stage shift register circuit outputs for providing a signal to an output load, comprising, for each stage of the shift register circuit:
15 controlling an input section to couple a first clocked power line voltage to the output of the input section, compensating for the effects of a parasitic capacitance of a drive transistor, using the output of the stage one or more stage before the stage to charge the gate of the drive transistor through an input transistor and to charge a first bootstrap capacitor storing the gate-
20 source voltage of the drive transistor; and
controlling an output section using the outputs of the input sections as timing signals for generating output signals to the output loads.

25. A method as claimed in claim 24, wherein controlling the input
25 section comprises using the output of the stage two or more stages before the stage to charge the gate of an input transistor, and storing the gate-source voltage on a second bootstrap capacitor; and
coupling a first clocked power supply line voltage to the output of the stage through the drive transistor.

30
26. A method as claimed in claim 24 or 25, wherein controlling the output section comprises coupling a second clocked power line voltage to the

output of the output section, compensating for the effects of a parasitic capacitance of a drive transistor, using the output of the stage one or more stage before the stage to charge the gate of the drive transistor through an input transistor and to charge a first bootstrap capacitor storing the gate-source voltage of the drive transistor.

5

ABSTRACT

A SHIFT REGISTER CIRCUIT

5 Each stage of a shift register circuit has an input section (60) and an output section (62). The input section of each stage comprises an input section drive transistor (T_{drive}) for coupling a first clocked power line voltage (P_n) to the output of the input section (60), an input section compensation capacitor (C_1) for compensating for the effects of a parasitic capacitance of the input section drive transistor (T_{drive}) and a first input section bootstrap capacitor (C_2)
10 connected between the gate of the drive transistor and the output of the input section. The input section (60) of each stage uses the output (R_{n-1}) of the input section (60) of at least one preceding stage as a timing control input for controlling a bootstrap function, and the output section (62) of each stage
15 comprises a circuit which receives the outputs of multiple input sections (60) as timing signals for generating output signals for the output loads (64).

 This circuit uses one stage to provide the required timing signals, and has feedback of timing signals between stages. This stage has low output load, and can therefore be realized with low size components, and the timing
20 signal retain their shape even when there is degradation of the component characteristics. The other stage drives the load, and the output signals are not used as feedback timing signals, so that the output load does not degrade the timing control signals used in other stages

25 [Fig. 6]

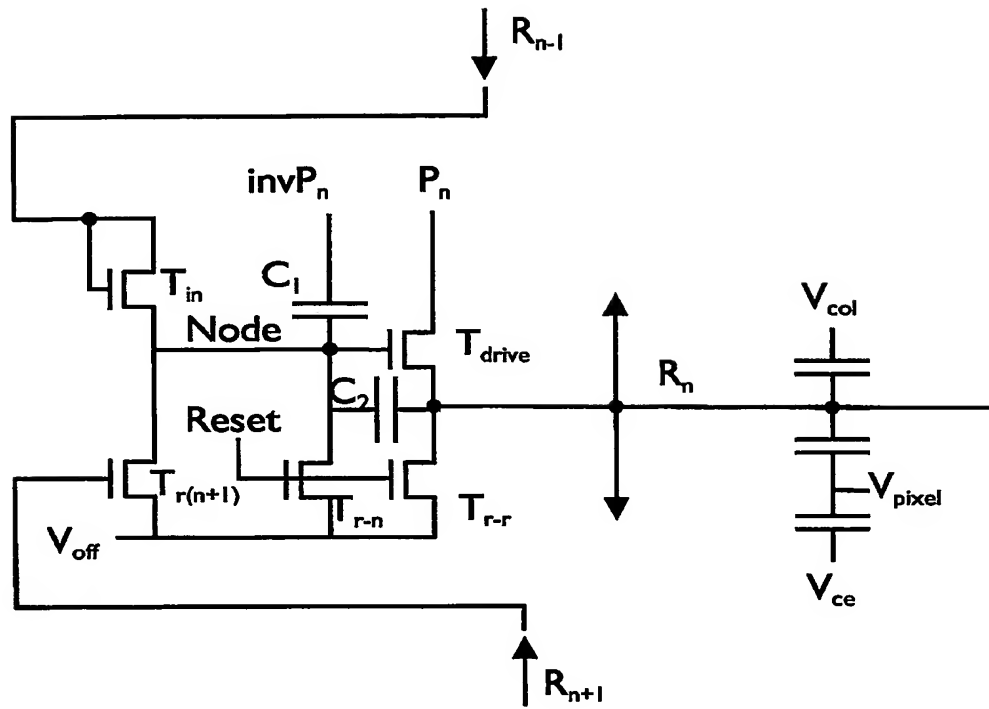
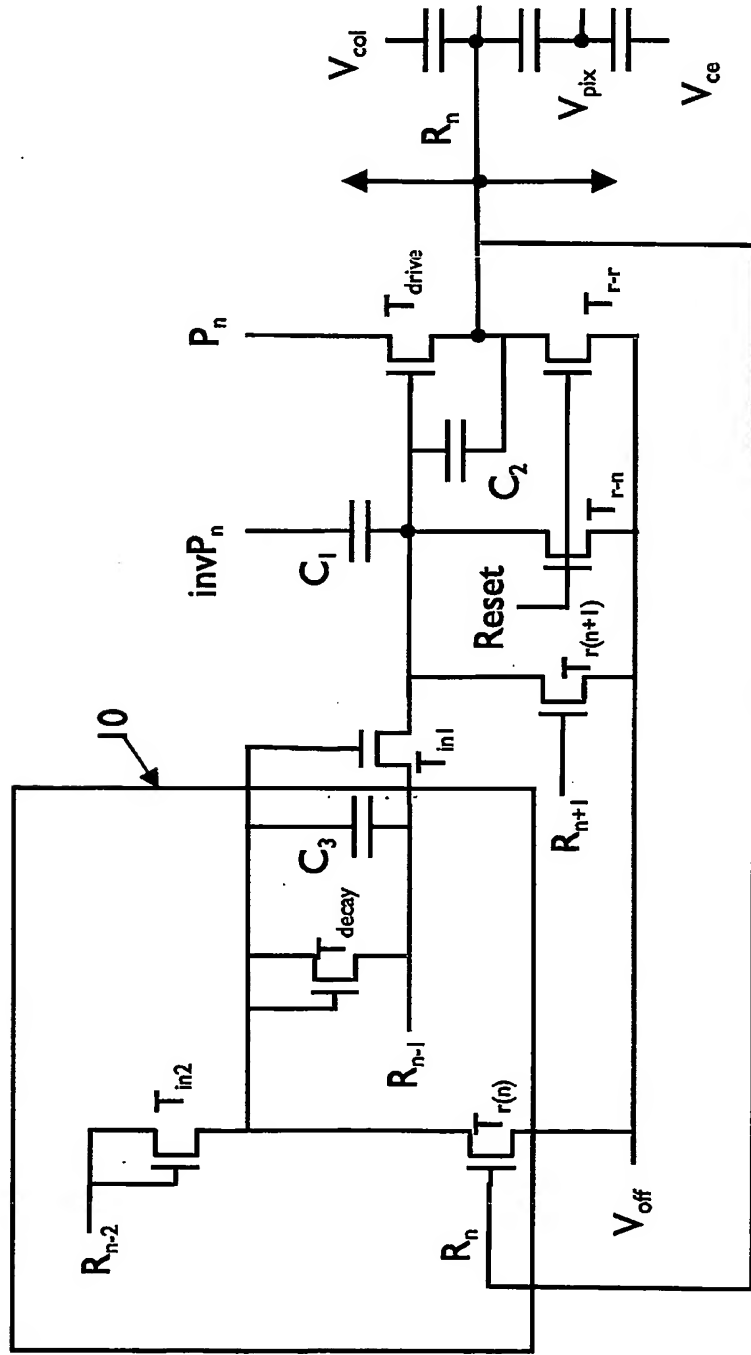


FIG. 1



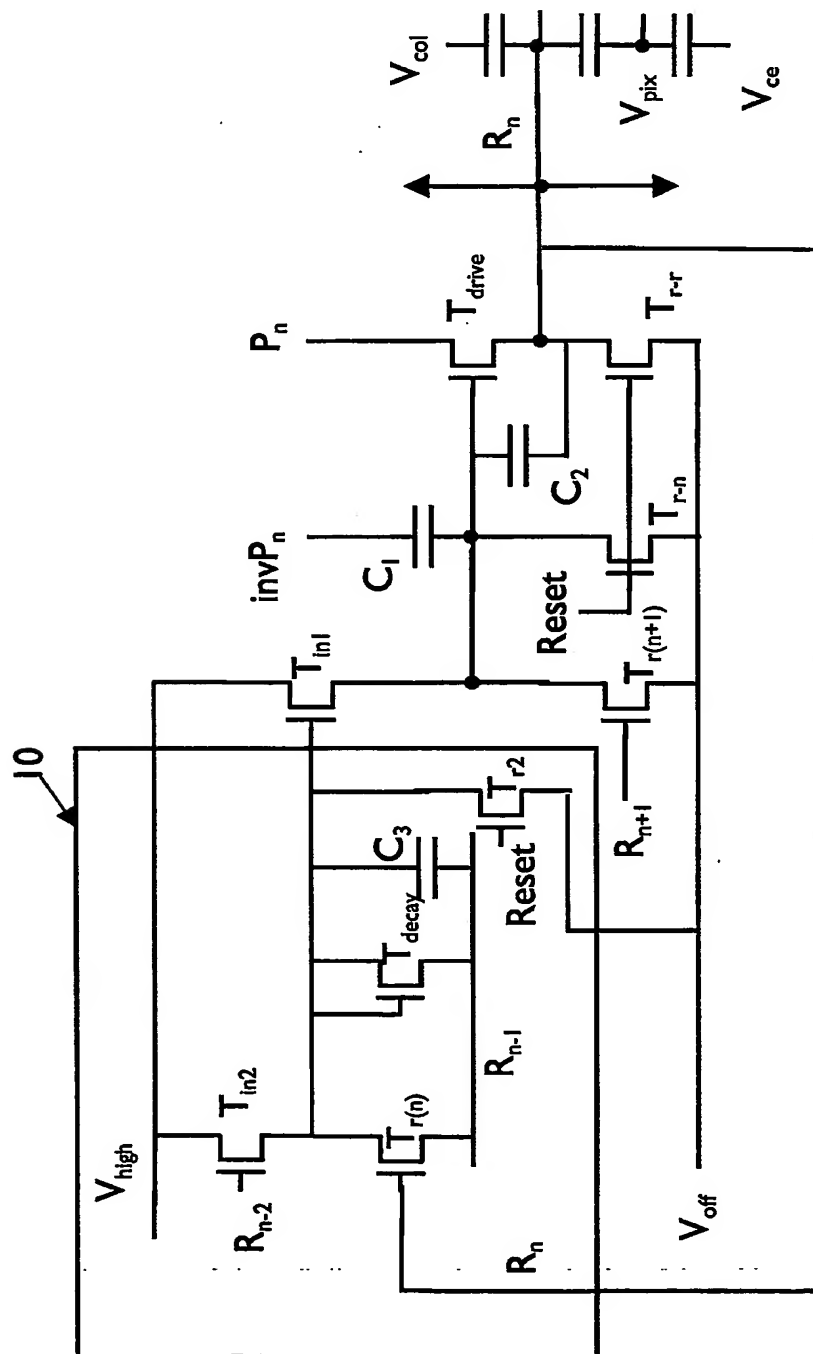
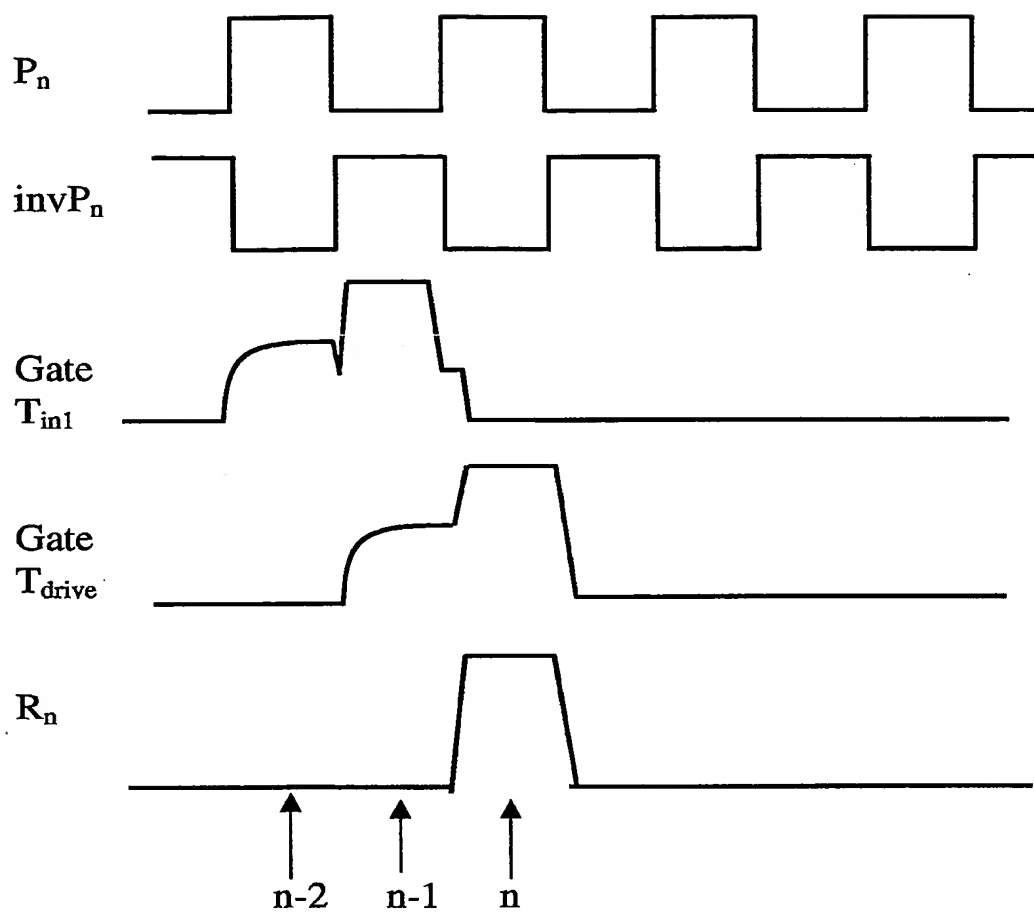
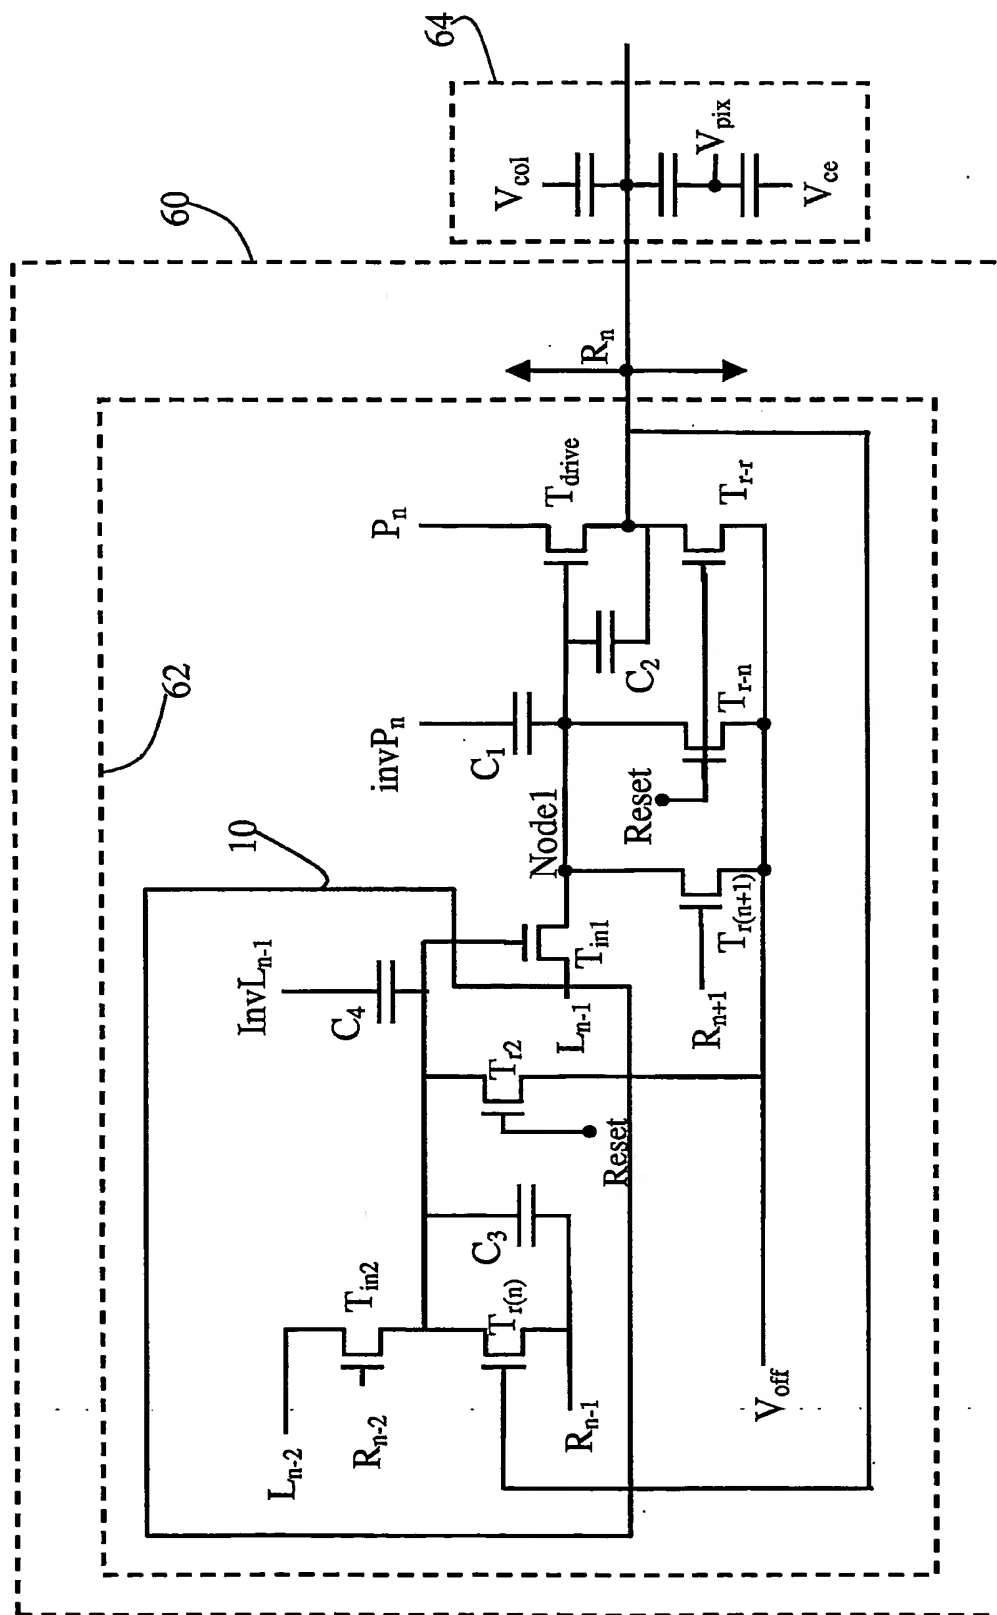
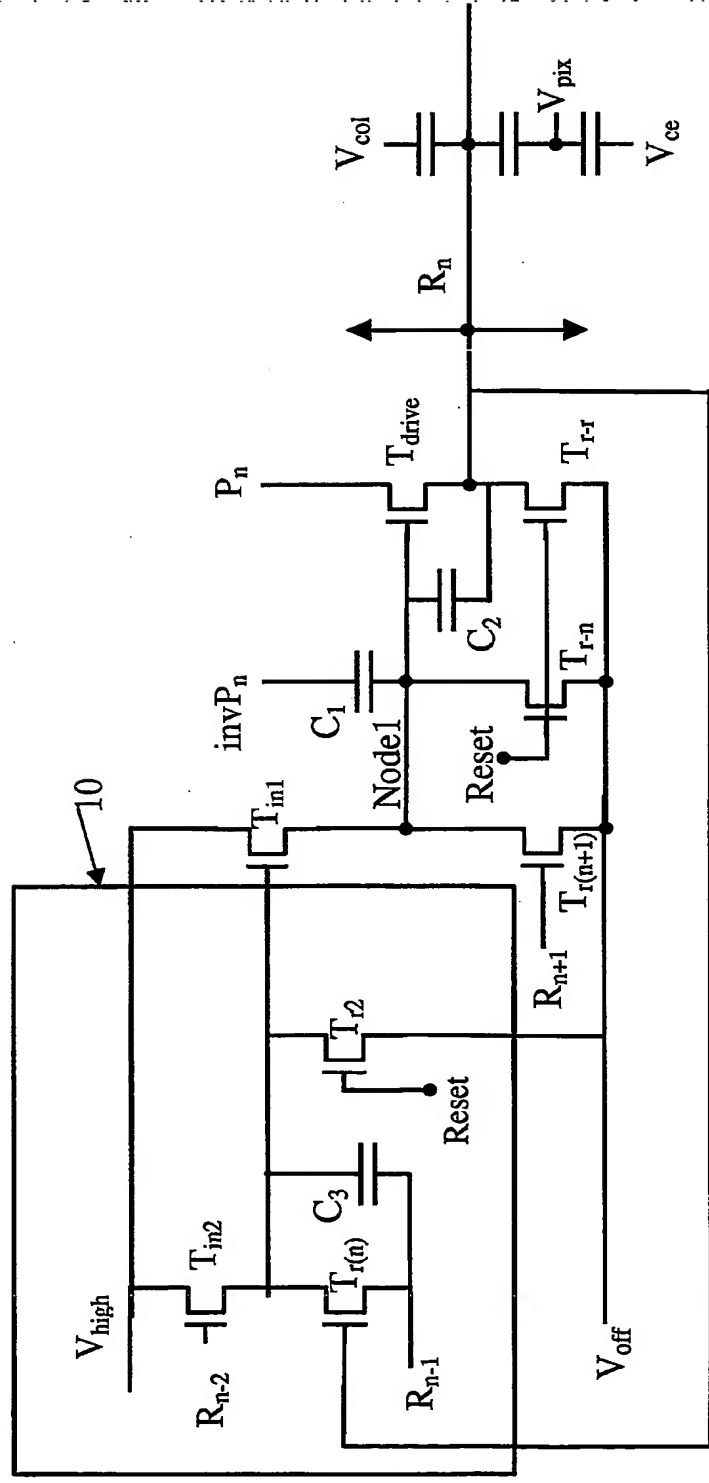


FIG. 3

*FIG. 4*





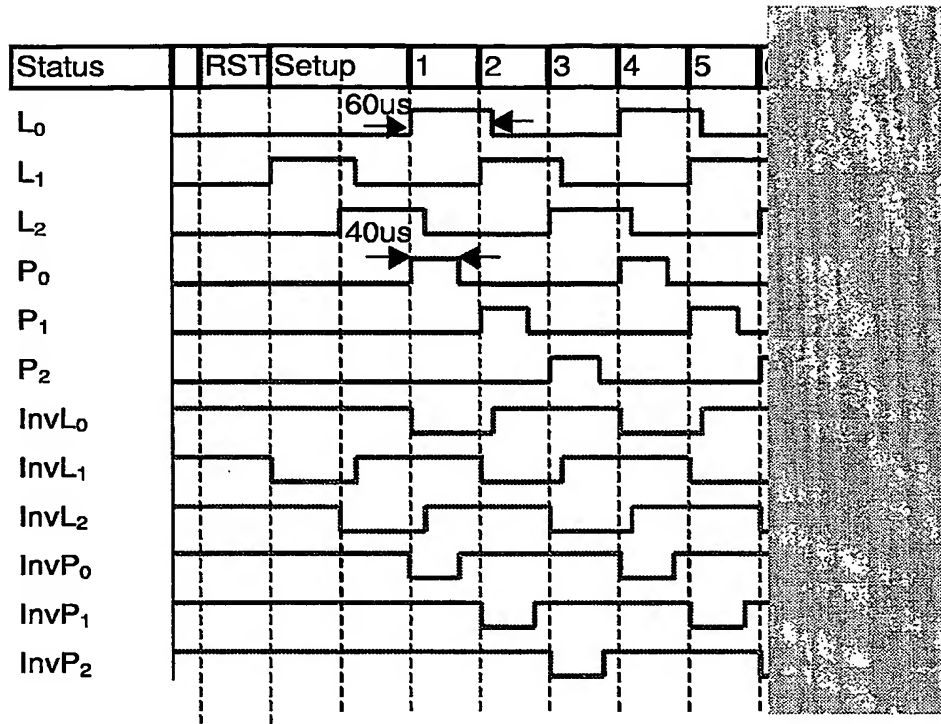
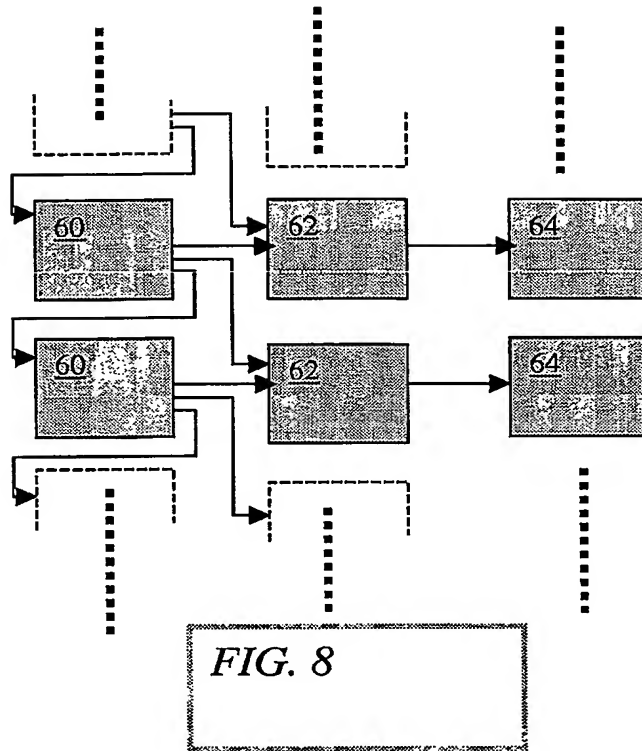


FIG. 7



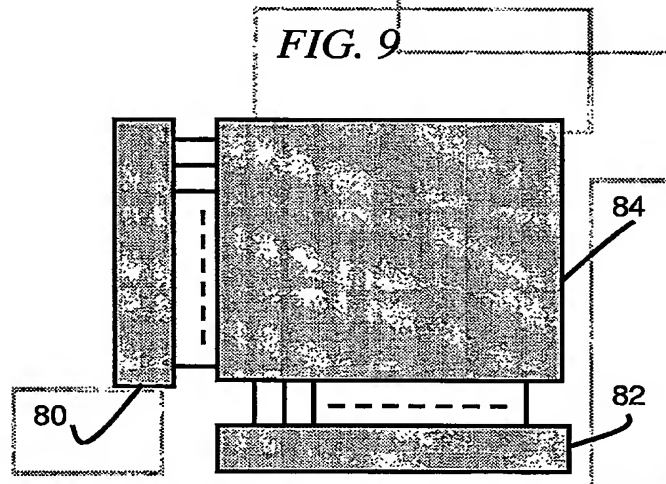
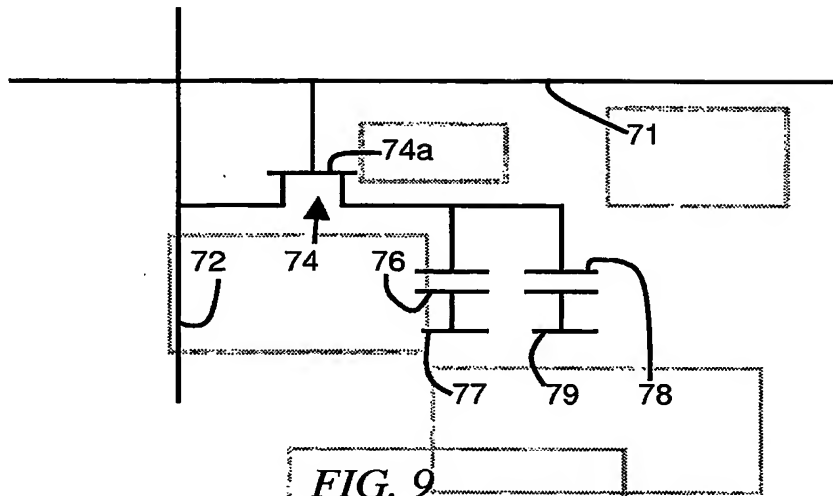


FIG. 10

PATENT COOPERATION TREATY

PCT/IB2006/050855

From the INTERNATIONAL BUREAU

PCTNOTIFICATION CONCERNING
SUBMISSION OR TRANSMITTAL
OF PRIORITY DOCUMENT

To:

WILLIAMSON, Paul, L.
c/o Philips Intellectual Property
& Standards
Cross Oak Lane
Redhill Surrey RH1 5HA
ROYAUME-UNI

(PCT Administrative Instructions, Section 411)

Date of mailing (day/month/year) 15 May 2006 (15.05.2006)	
Applicant's or agent's file reference PHGB050040	IMPORTANT NOTIFICATION
International application No. PCT/IB2006/050855	International filing date (day/month/year) 20 March 2006 (20.03.2006)
International publication date (day/month/year) Not yet published	Priority date (day/month/year) 22 March 2005 (22.03.2005)
Applicant KONINKLIJKE PHILIPS ELECTRONICS N.V. et al	

1. By means of this Form, which replaces any previously issued notification concerning submission or transmittal of priority documents, the applicant is hereby notified of the date of receipt by the International Bureau of the priority document(s) relating to all earlier application(s) whose priority is claimed. Unless otherwise indicated by the letters "NR", in the right-hand column or by an asterisk appearing next to a date of receipt, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).

2. (If applicable) The letters "NR" appearing in the right-hand column denote a priority document which, on the date of mailing of this Form, had not yet been received by the International Bureau under Rule 17.1(a) or (b). Where, under Rule 17.1(a), the priority document must be submitted by the applicant to the receiving Office or the International Bureau, but the applicant fails to submit the priority document within the applicable time limit under that Rule, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

3. (If applicable) An asterisk (*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b) (the priority document was received after the time limit prescribed in Rule 17.1(a) or the request to prepare and transmit the priority document was submitted to the receiving Office after the applicable time limit under Rule 17.1(b)). Even though the priority document was not furnished in compliance with Rule 17.1(a) or (b), the International Bureau will nevertheless transmit a copy of the document to the designated Offices, for their consideration. In case such a copy is not accepted by the designated Office as the priority document, Rule 17.1(c) provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

Priority date

Priority application No.

Country or regional Office
or PCT receiving OfficeDate of receipt
of priority document

22 March 2005 (22.03.2005)

05102311.7

EP

23 March 2006 (23.03.2006)

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Authorized officer

Gijsbertus Beijer

Facsimile No. +41 22 338 82 70

Facsimile No. +41 22 338 82 70

Telephone No. +41 22 338 95 61

Form PCT/IB/304 (October 2005)

CUMPF4WQ